

## VEZETÉK NÉLKÜLI MOZGÁSÉRZÉKELŐ SZENZOR

CH-WZB-PMS-100

v1.0.0

### Termékjellemzők:

Felületeken elhelyezhető, elemes (CR2450) mozgásérzékelő szenzor	
Protokoll	ZigBee 3.0



Paraméter	Érték			Mértékegység
	Min	Jellemző	Max	
Érzékelési távolság			7	m
Érzékelés szöge			170	°

Környezeti jellemzők	
IP védettség	IP20
Működési Hőmérséklet	-10°C - +50°C

Logisztikai adatok	
Tömeg	96 g
Méret	74x59x58 mm



CE tanúsítvány száma:

LCS2000715109AE

Töltse le a Chameleon mobilalkalmazást!





Termék elérhető itt:




Rajzok


Attach the main body to the base using the adhesive protective film.

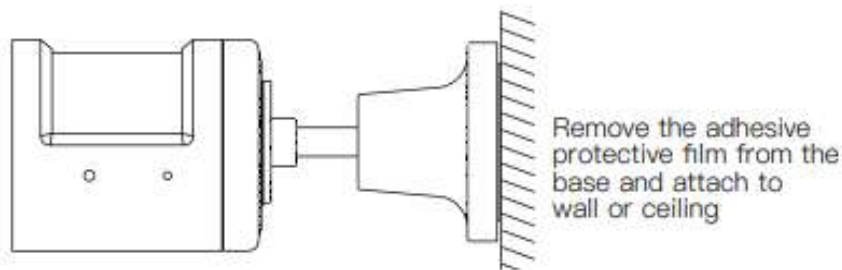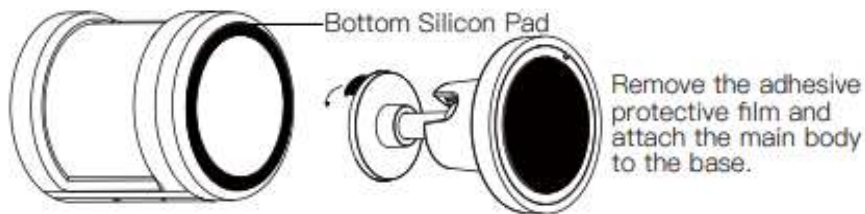


The bonding surface must be clean, dry and smooth without rust, stain or dust.



For a better bonding effect, apply force to the adhesive and bonding surface to secure the bond.



The VHB double-sided tape creates a strong bond quickly, which can reach full strength after 72 Hours. During this period, do not perform structural operations.



The tape requires a minimum application temperature of 10°C. A low temperature will decrease the adhesiveness of the tape and slow down drying.